


OPEN TYPE MOTOR

40W


□90mm

LEAD WIRE TYPE

DIMENSIONS

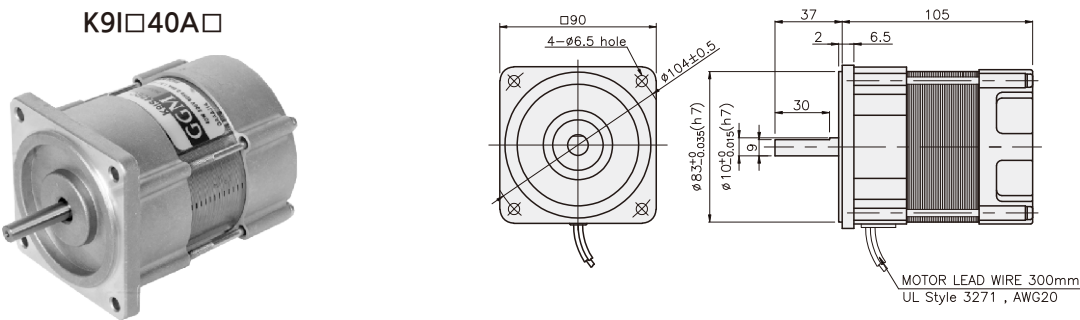

CONNECTION DIAGRAMS

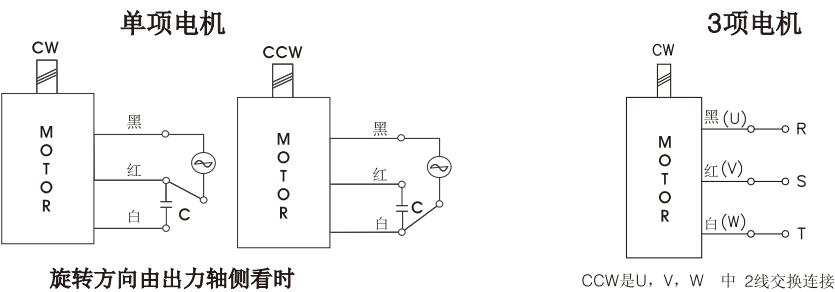

SPECIFICATIONS

40W 连续正格，4极

| Model    |     | Voltage (V) | Frequency (Hz) | Current (A) | Start T. (N·m/kgf·cm) | Rated T. (N·m/kgf·cm) | Speed (rpm) | Condenser (μF) |
|----------|-----|-------------|----------------|-------------|-----------------------|-----------------------|-------------|----------------|
| K9I□40AJ | 单 项 | 100         | 50             | 0.86        | 0.21/2.1              | 0.315/3.15            | 1250        | 12             |
|          |     |             | 60             | 0.84        | 0.22/2.2              | 0.255/2.55            | 1550        |                |
| K9I□40AU |     | 110         | 60             | 0.65        | 0.19/1.9              | 0.255/2.55            | 1550        | 8              |
|          |     |             |                | 0.68        | 0.2/2                 |                       |             |                |
| K9I□40AL |     | 200         | 50             | 0.4         | 0.22/2.2              | 0.315/3.15            | 1250        | 3              |
|          |     |             | 60             | 0.41        |                       | 0.255/2.55            | 1550        |                |
| K9I□40AC |     | 220         | 50             | 0.38        | 0.24/2.4              | 0.315/3.15            | 1250        | 2.5            |
|          |     |             | 60             | 0.37        |                       | 0.255/2.55            | 1550        |                |
|          |     | 230         | 50             | 0.4         | 0.26/2.6              | 0.315/3.15            | 1250        |                |
|          |     |             | 60             | 0.38        |                       | 0.255/2.55            | 1550        |                |
| K9I□40AD |     | 240         | 50             | 0.39        | 0.2/2                 | 0.3/3                 | 1300        | 2              |
| K9I□40AT | 3 项 | 200         | 50             | 0.39        | 1/10                  | 0.3/3                 | 1300        | —              |
|          |     |             | 60             | 0.32        | 0.78/7.8              | 0.245/2.45            | 1600        |                |
| K9I□40AH |     | 220         | 50             | 0.33        | 0.95/9.5              | 0.29/2.9              | 1350        |                |
|          |     |             | 60             | 0.31        | 0.78/7.8              | 0.245/2.45            | 1600        |                |
| 230      |     | 50          | 0.41           | 1/10        | 0.29/2.9              | 1350                  |             |                |
|          |     | 60          | 0.32           | 0.83/8.3    | 0.245/2.45            | 1600                  |             |                |
| K9I□40AM |     | 380         | 50             | 0.18        | 1/10                  | 0.29/2.9              | 1350        |                |
|          |     |             | 60             |             | 0.78/7.8              | 0.245/2.45            | 1600        |                |
| K9I□40AV |     | 400         | 50             | 0.18        | 1.15/11.5             | 0.29/2.9              | 1350        |                |
|          |     |             | 60             | 0.19        | 0.88/8.8              | 0.245/2.45            | 1600        |                |
| K9I□40AQ |     | 415         | 50             | 0.16        | 0.95/9.5              | 0.29/2.9              | 1350        |                |
|          |     |             | 60             | 0.14        | 0.72/7.2              | 0.245/2.45            | 1600        |                |
| K9I□40AZ | 440 | 50          | 0.19           | 1/10        | 0.29/2.9              | 1350                  |             |                |
|          |     | 60          | 0.16           | 0.79/7.9    | 0.245/2.45            | 1600                  |             |                |

\* 电机式样与感应电机一样。适用于减速机K6G□B(C)系列。  
\* 适用减速机及减速比例输出扭矩值时，请参考感应电机的扭矩及减速机。  
\* □：电机轴形状（S：STRAIGHT，G：PINION）